


FLOW RANGE: 24 - 55 GPM

OUTLET SIZE: 2" NPT

NOMINAL DIA. 4"

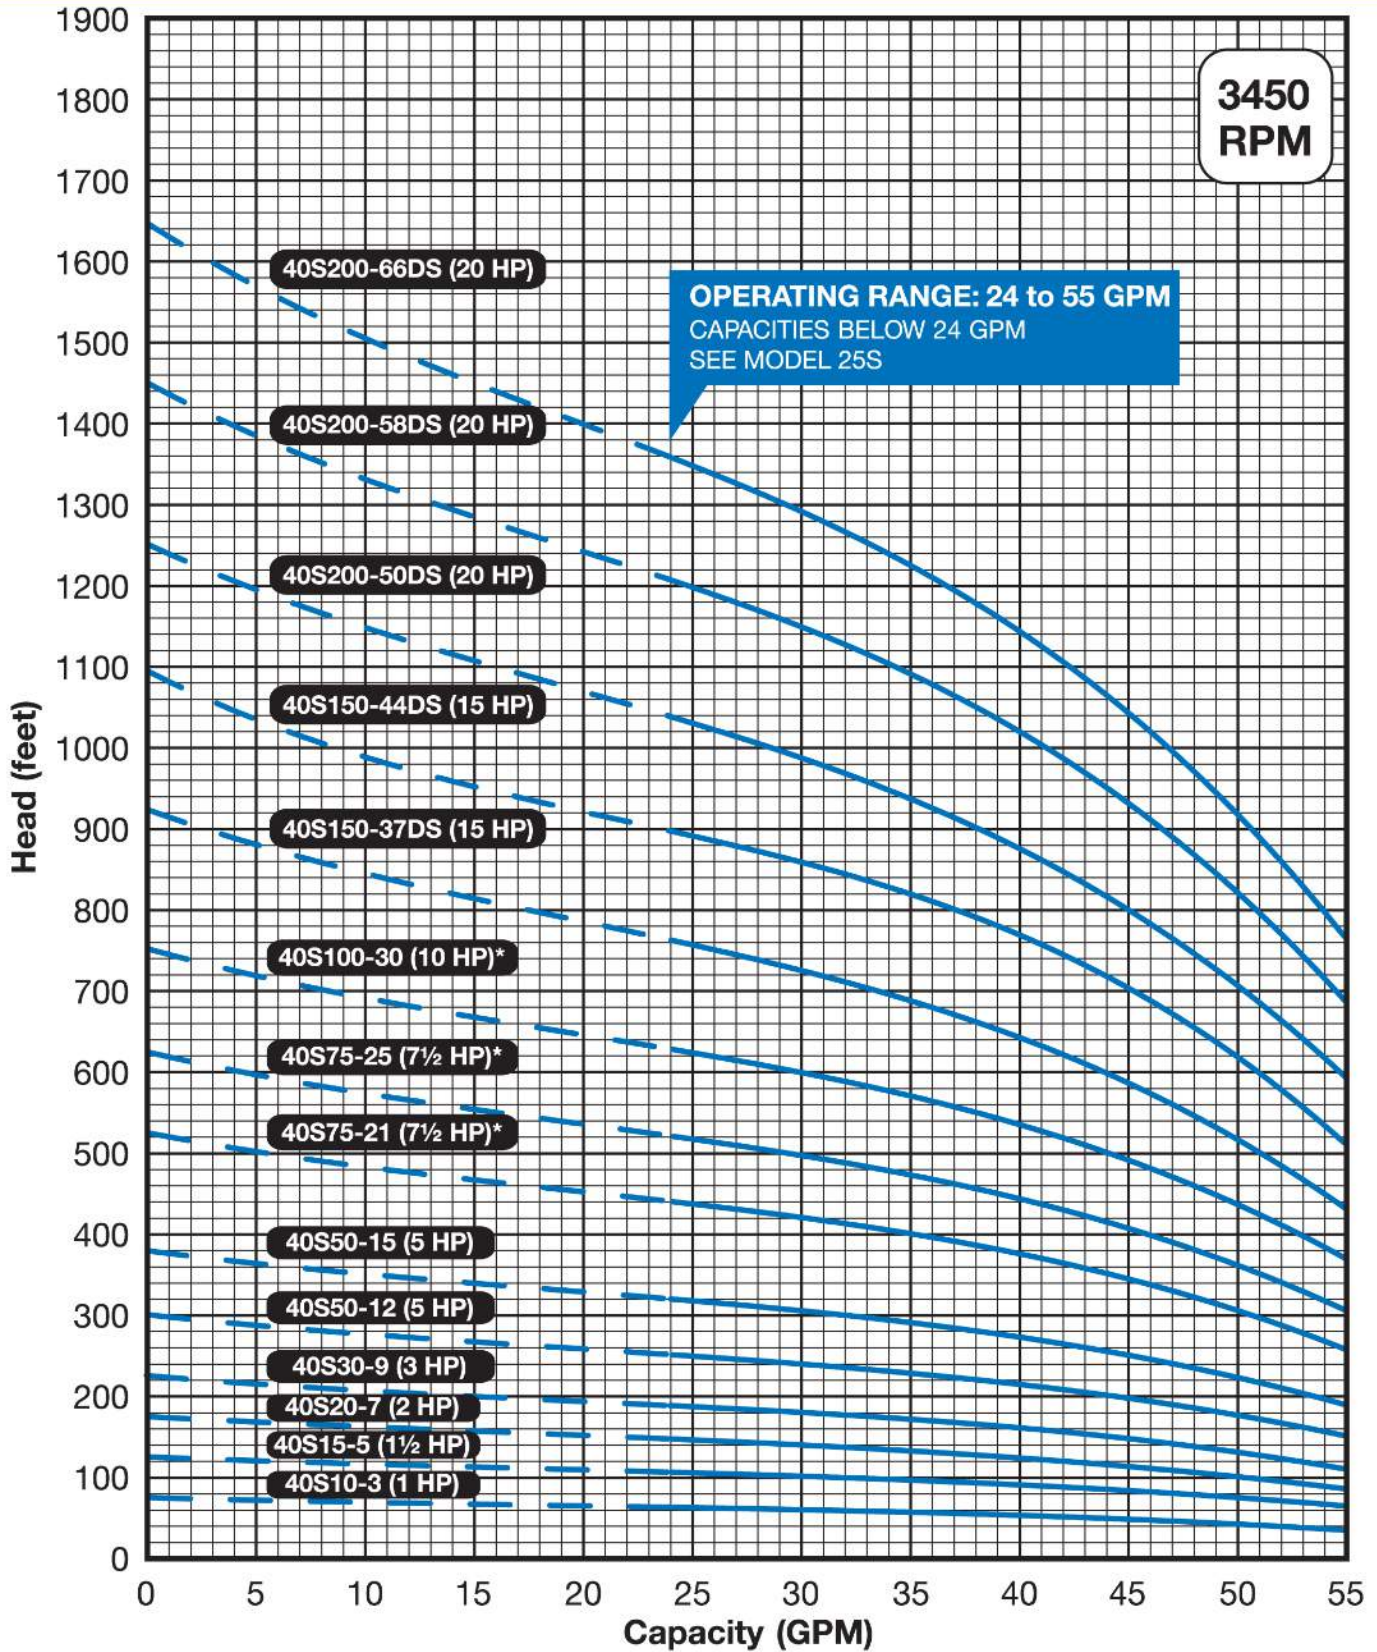

Specifications subject to change without notice.

4" motor standard, 1-10 HP/3450 RPM.

6" motor standard, 15-20 HP/3450 RPM.

* Also available with 6" motor.

DS = Deep Set model version for high head requirements.

Performance conforms to ISO 9906 Annex A @ 10 ft. minimum submergence.



DIMENSIONS & WEIGHTS


Model No.	Fig.	HP	Motor Size		Discharge Size	Dimensions										Approximate Shipping Wt.	
			In.	CM		A		B		C		D		E		Lbs.	Kg
40S10-3	A	1	4	10	2" NPT	24.6	62.5	11.8	30.0	12.8	32.5	3.8	9.7	3.9	9.9	32	14.5
40S15-5	A	1½	4	10	2" NPT	29.7	75.4	13.6	34.5	16.1	40.9	3.8	9.7	3.9	9.9	37	16.8
40S20-7	A	2	4	10	2" NPT	34.5	87.6	15.1	38.4	19.4	49.3	3.8	9.7	3.9	9.9	41	18.6
40S30-9	A	3	4	10	2" NPT	43.3	110.0	20.6	52.3	22.7	57.7	3.8	9.7	3.9	9.9	65	29.5
40S50-12	A	5	4	10	2" NPT	51.3	130.3	23.6	59.9	27.7	70.4	3.8	9.7	3.9	9.9	78	35.4
40S50-15	A	5	4	10	2" NPT	56.2	142.7	23.6	59.9	32.6	82.8	3.8	9.7	3.9	9.9	84	38.1
40S75-21*	A	7½	4	10	2" NPT	74.6	189.5	29.6	75.2	45	114.3	3.8	9.7	3.9	9.9	120	54.4
40S75-25*	A	7½	4	10	2" NPT	81.2	206.2	29.6	75.2	51.6	131.1	3.8	9.7	3.9	9.9	124	56.2
40S100-30*	A	10	4	10	2" NPT	103.7	263.4	43.9	111.5	59.8	151.9	3.8	9.7	3.9	9.9	181	82.1
40S150-37DS	A	15	6	15	2" NPT	99.5	252.7	28	71.1	71.5	181.6	5.4	13.7	5.4	13.7	244	110.7
40S150-44DS	A	15	6	15	2" NPT	111	281.9	28	71.1	83	210.8	5.4	13.7	5.4	13.7	340	154.2
40S200-50DS†	B	20	6	15	2" MPT	136	345.4	30.6	77.7	105.4	267.7	5.4	13.7	5.5	14.0	319	144.7
40S200-58DS†	B	20	6	15	2" MPT	149.2	379.0	30.6	77.7	118.6	301.2	5.4	13.7	5.5	14.0	334	151.5
40S200-66DS†	B	20	6	15	2" MPT	162.4	412.5	30.6	77.7	131.8	334.8	5.4	13.7	5.5	14.0	394	178.7

NOTES: All models suitable for use in 4" (10 cm) wells, unless otherwise noted.
 Weights include pump end with motor in lbs.
 *Also available with 6" (15 cm) motor.
 †Built into sleeve 2" MPT discharge, 6" (15 cm) minimum well diameter.

MATERIALS OF CONSTRUCTION

COMPONENT	CYLINDRICAL SHAFT (3-44 Stgs.)	DEEP SET (50-66 Stgs.)
Check Valve Housing	304 Stainless Steel	304 Stainless Steel
Check Valve	304 Stainless Steel	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel	304 Stainless Steel
Impeller	304 Stainless Steel	304 Stainless Steel
Suction Interconnector	304 Stainless Steel	304 Stainless Steel
Inlet Screen	304 Stainless Steel	304 Stainless Steel
Pump Shaft	431 Stainless Steel	431 Stainless Steel
Straps	304 Stainless Steel	304 Stainless Steel
Cable Guard	304 Stainless Steel	304 Stainless Steel
Priming Inducer	304 Stainless Steel	304 Stainless Steel
Coupling	316 Stainless Steel	316 Stainless Steel
Check Valve Seat	NBR/316 Stainless Steel	NBR/316 Stainless Steel
Top Bearing	PTFE/316 Stainless Steel	PTFE/316 Stainless Steel
Impeller Seal Ring	PTFE/316 Stainless Steel	PTFE/316 Stainless Steel
Intermediate Bearings	PTFE/316 Stainless Steel	PTFE/316 Stainless Steel
Shaft Upthrust Washer	LCP (Vectra®)	LCP (Vectra®)
Split Cone	304 Stainless Steel	304 Stainless Steel
Split Cone Nut	304 Stainless Steel	304 Stainless Steel
Sleeve	Not Required	316 Stainless Steel
Sleeve Flange	Not Required	304 Stainless Steel

NOTES: Specifications are subject to change without notice.
 Vectra® is a registered trademark of Hoechst Calanese Corporation.

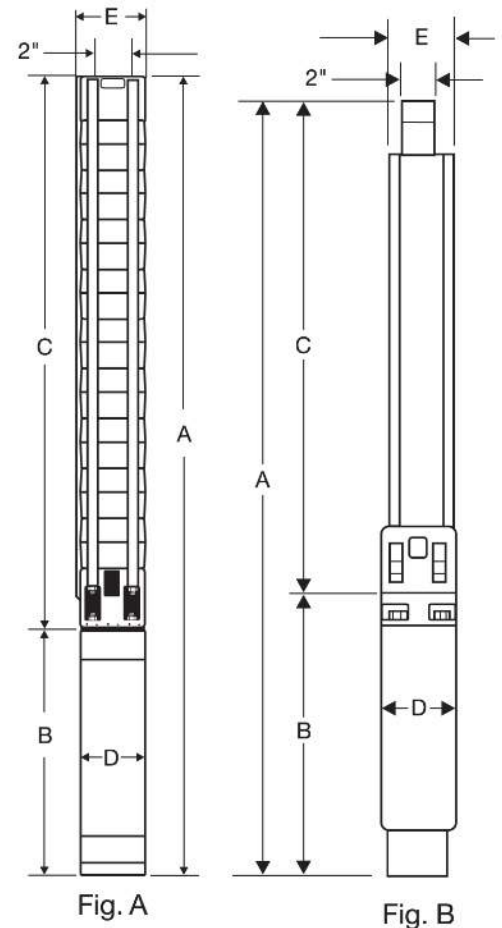

Integrated Environmental Technologies, Inc.
 124 Edgewood Drive, Washington, PA 15301
 (800) 270-6052 | FAX: (724) 261-5330
 sales@ietechinc.com | www.ietechinc.com