


FLOW RANGE: 1.2 - 7 GPM

OUTLET SIZE: 1" NPT

NOMINAL DIA. 4"

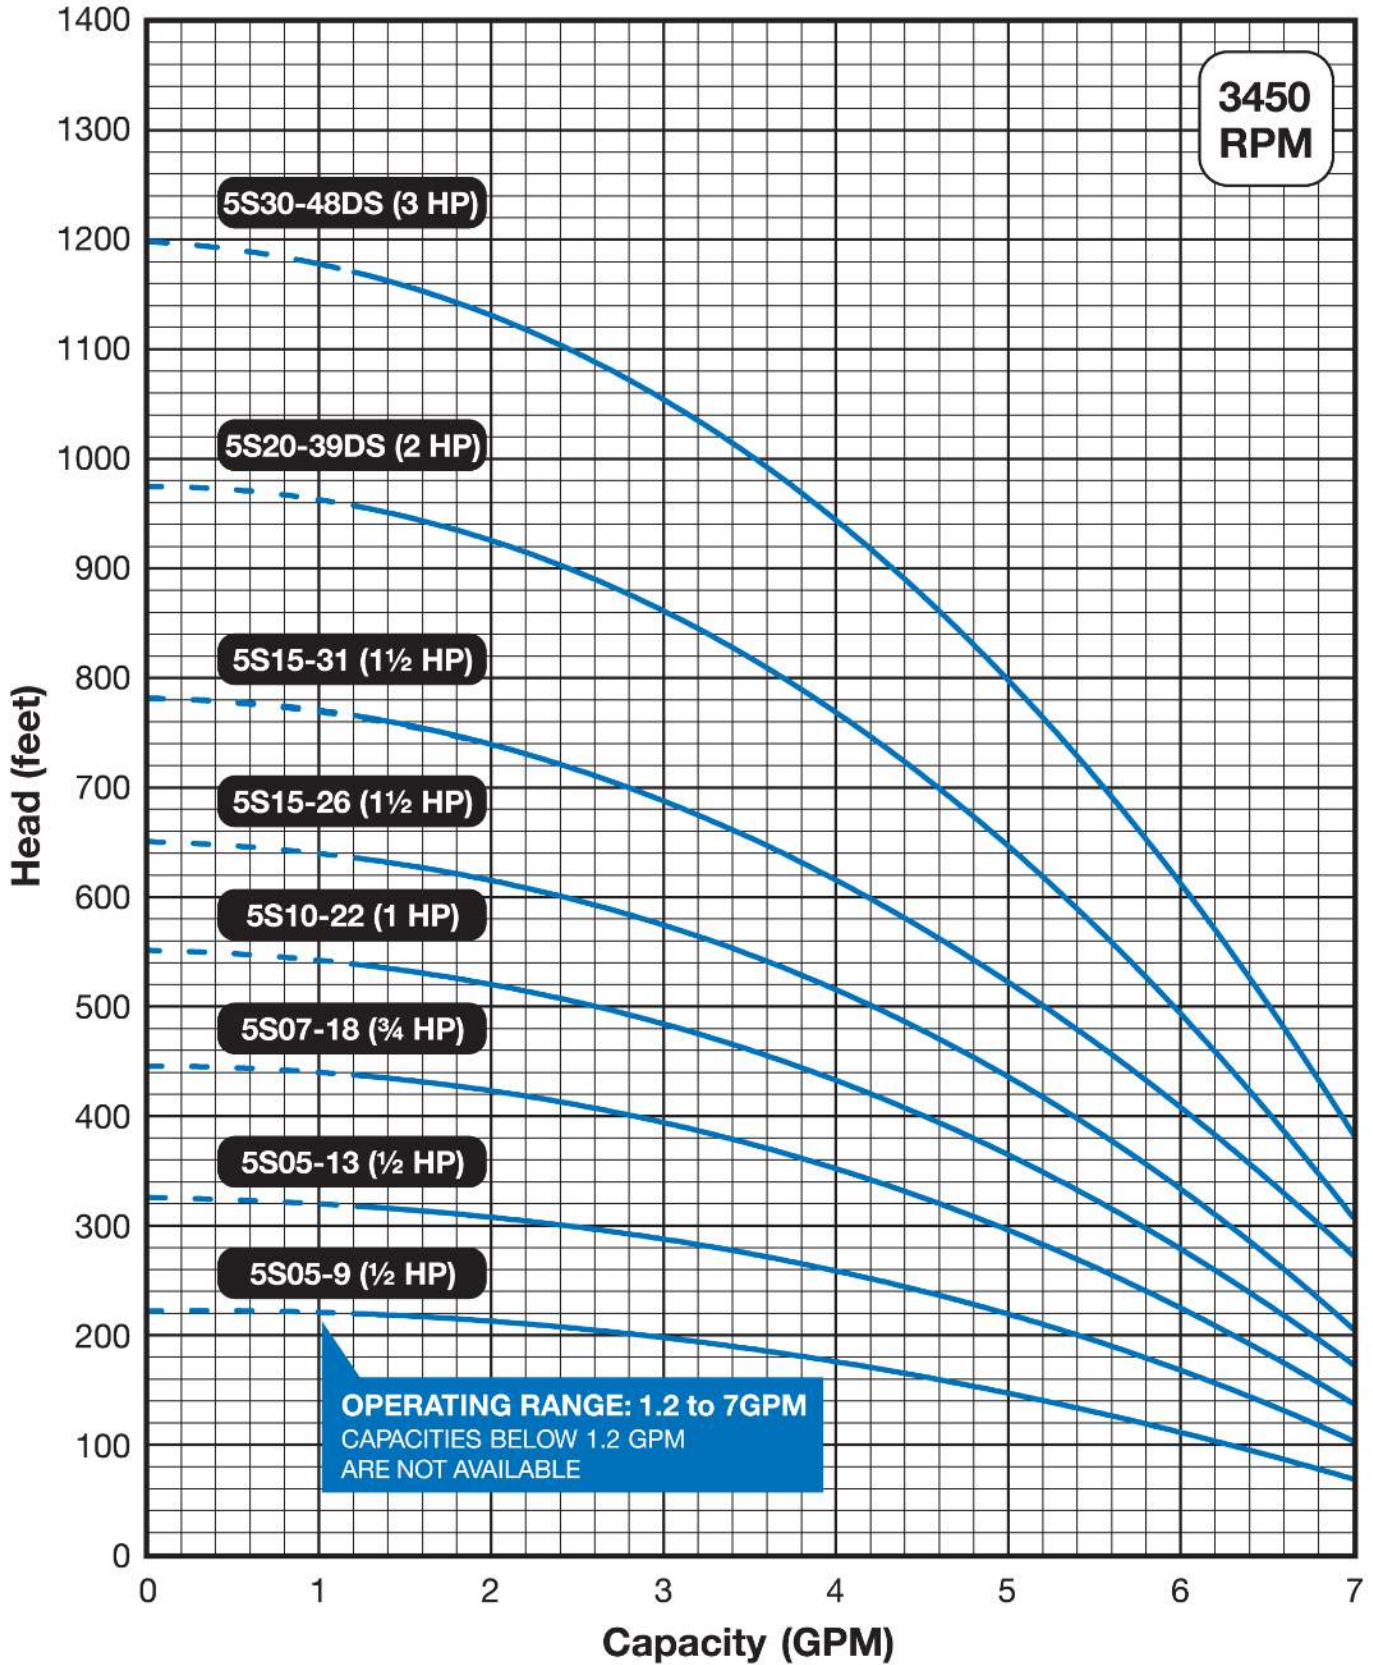

Specifications subject to change without notice.  
4" motor standard, 3450 RPM.  
DS = Deep Set model version for high head requirements.  
Performance conforms to ISO 2548 Annex B @ 2 ft. minimum submergence.



**DIMENSIONS & WEIGHTS**


Model No.	HP	Motor Size		Discharge Size	Dimensions										Approximate Shipping Wt.	
		In.	CM		A		B		C		D		E		Lbs.	Kg
5S05-9	½	4	10	1" NPT	22.3	56.6	8.8	22.4	13.5	34.3	3.8	9.7	3.9	9.9	27	12.2
5S05-13	½	4	10	1" NPT	26.4	67.1	9.5	24.1	16.9	42.9	3.8	9.7	3.9	9.9	31	14.1
5S-07-18	¾	4	10	1" NPT	31.7	80.5	10.7	27.2	21	53.3	3.8	9.7	3.9	9.9	34	15.4
5S10-22	1	4	10	1" NPT	36.1	91.7	11.8	30.0	24.3	61.7	3.8	9.7	3.9	9.9	42	19.1
5S15-26	1 ½	4	10	1" NPT	41.2	104.6	13.6	34.5	27.6	70.1	3.8	9.7	3.9	9.9	46	20.9
5X15-31	1 ½	4	10	1" NPT	47.1	119.6	13.6	34.5	33.5	85.1	3.8	9.7	3.9	9.9	58	26.3
5S20-39DS	2	4	10	1" NPT	55.2	140.2	15.1	38.4	40.1	101.9	3.8	9.7	3.9	9.9	65	29.5
5S30-48DS	3	4	10	1" NPT	70	177.8	20.6	52.3	49.3	125.2	3.8	9.7	3.9	9.9	90	40.8

NOTES: All models suitable for use in 4" (10 cm) wells.  
Weights include pump end with motor in lbs.

**MATERIALS OF CONSTRUCTION**

COMPONENT	SPLINED SHAFT (9-26 Stgs.)	CYLINDRICAL SHAFT (31-48 Stgs.)
Check Valve Housing	304 Stainless Steel	304 Stainless Steel
Check Valve	304 Stainless Steel	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel	304 Stainless Steel
Impeller	304 Stainless Steel	304 Stainless Steel
Suction Interconnector	304 Stainless Steel	304 Stainless Steel
Inlet Screen	304 Stainless Steel	304 Stainless Steel
Pump Shaft	304 Stainless Steel	431 Stainless Steel
Straps	304 Stainless Steel	304 Stainless Steel
Cable Guard	304 Stainless Steel	304 Stainless Steel
Priming Inducer	304 Stainless Steel	316 Stainless Steel
Coupling	329/420/431 Stainless Steel	329/420/431 Stainless Steel
Check Valve Seat	NBR/304 Stainless Steel	NBR/316 Stainless Steel
Top Bearing	PTFE/304 Stainless Steel	PTFE/316 Stainless Steel
Impeller Seal Ring	PTFE	PTFE
Intermediate Bearings	PTFE	304 Stainless Steel
Shaft Washer*	Not Required	LCP (Vectra®)
Split Cone*	Not Required	304 Stainless Steel
Split Cone Nut*	Not Required	316 Stainless Steel

NOTES: Specifications subject to change without notice.  
Valox® is a registered trademark of General Electric Co.  
Vectra® is a registered trademark of Hoechst Calanese Corporation.  
Ryton® is a registered trademark of Phillips 66.  
\* For DS high-head pumps.

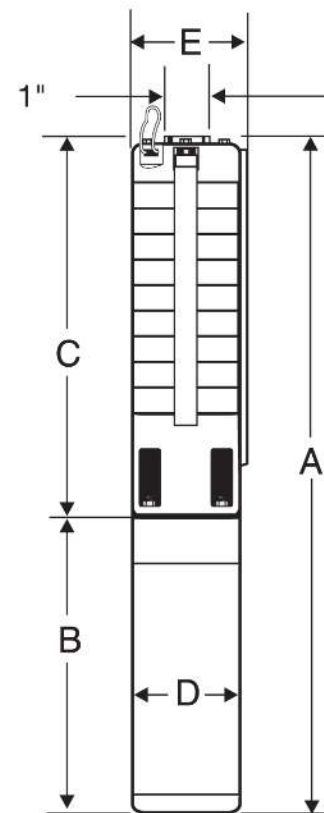

**Integrated Environmental Technologies, Inc.**  
124 Edgewood Drive, Washington, PA 15301  
(800) 270-6052 | FAX: (724) 261-5330  
sales@ietechinc.com | www.ietechinc.com