


FLOW RANGE: 5 - 14 GPM

OUTLET SIZE: 1¼" NPT

NOMINAL DIA. 4"

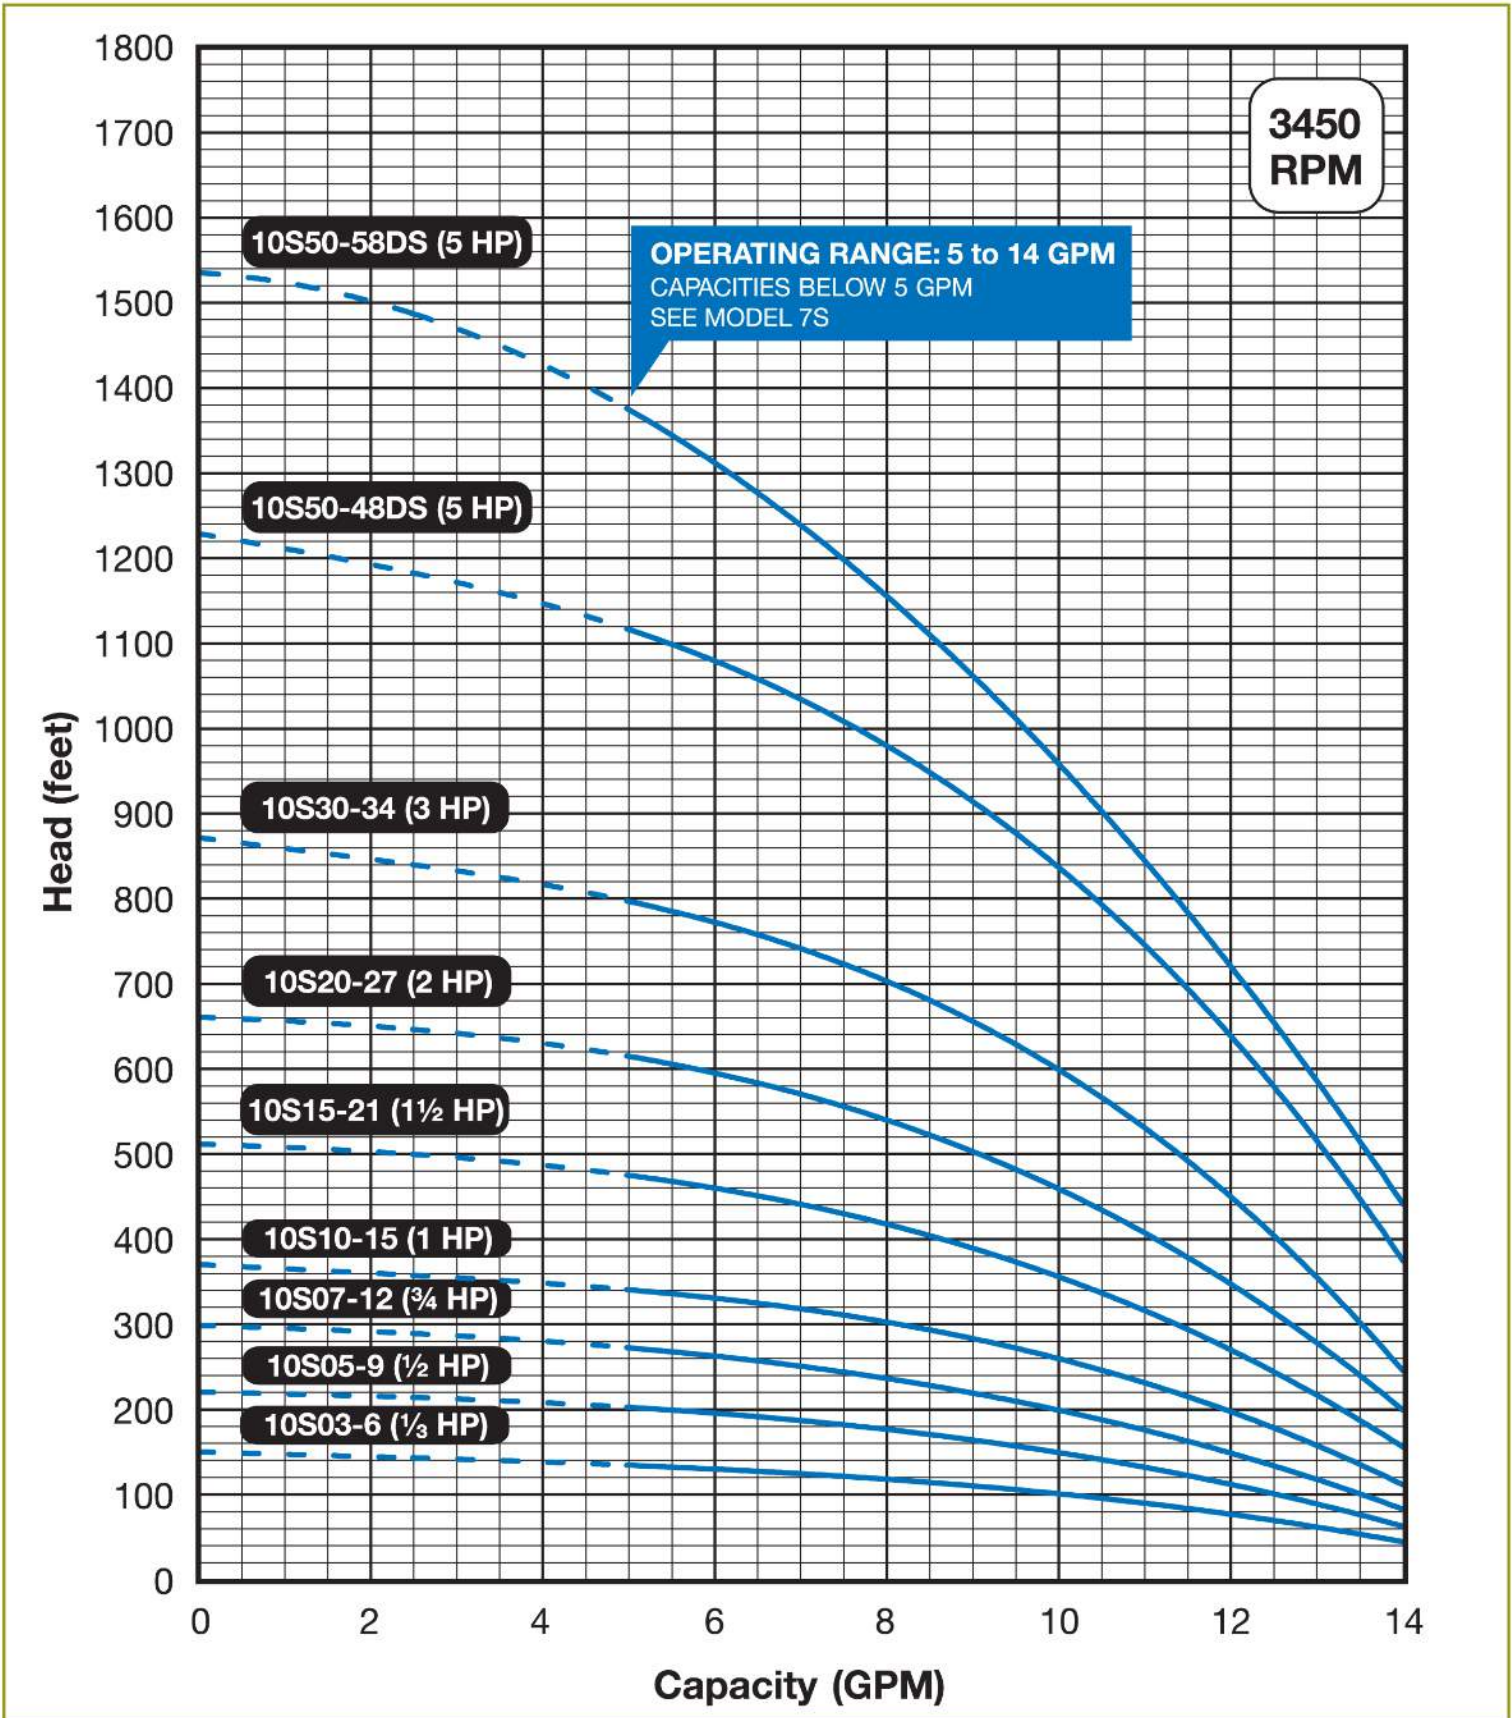

Specifications subject to change without notice.

4" motor standard, 3450 RPM.

DS = Deep Set model version for high head requirements.

Performance conforms to ISO 2548 Annex B @ 2 ft. minimum submergence.



**DIMENSIONS & WEIGHTS**

Model No.	Fig.	HP	Motor Size		Discharge Size	Dimensions										Approximate Shipping Wt.	
			In.	CM		A		B		C		D		E		Lbs.	Kg
10S03-6	A	½	4	10	1 ¼" NPT	19.9	50.5	8.8	22.4	11.1	28.2	3.8	9.7	3.9	9.9	26	11.8
10S05-9	A	½	4	10	1 ¼" NPT	23	58.4	9.5	24.1	13.5	34.3	3.8	9.7	3.9	9.9	29	13.2
10S07-12	A	¾	4	10	1 ¼" NPT	26.7	67.8	10.7	27.2	16	40.6	3.8	9.7	3.9	9.9	32	14.5
10S10-15	A	1	4	10	1 ¼" NPT	30.3	77.0	11.8	30.0	18.5	47.0	3.8	9.7	3.9	9.9	34	15.4
10S15-21	A	1 ½	4	10	1 ¼" NPT	37.1	94.2	13.6	34.5	23.5	59.7	3.8	9.7	3.9	9.9	44	20.0
10S20-27	A	2	4	10	1 ¼" NPT	43.5	110.5	15.1	38.4	28.4	72.1	3.8	9.7	3.9	9.9	49	22.2
10S30-34	A	3	4	10	1 ¼" NPT	54.7	138.9	20.6	52.3	34.1	86.6	3.8	9.7	3.9	9.9	83	37.6
10S50-48DS	A	5	4	10	1 ¼" NPT	69.4	176.3	23.6	59.9	45.8	116.3	3.8	9.7	3.9	9.9	115	52.2
10S50-58DS*	B	5	4	10	1 ¼" NPT	88.2	224.0	23.6	59.9	64.5	163.8	3.8	9.7	4.3	10.9	142	64.4

NOTES: All models suitable for use in 4" (10 cm) wells, unless otherwise noted.

Weights include pump end with motor in lbs.

\*Built into sleeve 1 ¼" MPT discharge, 5" minimum well diameter.

**MATERIALS OF CONSTRUCTION**

COMPONENT	SPLINED SHAFT (6-27 Stgs.)	CYLINDRICAL SHAFT (34-48 Stgs.)	DEEP SET (58 Stgs.)
Check Valve Housing	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Check Valve	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Diffuser Chamber	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Impeller	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Suction Interconnector	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Inlet Screen	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Pump Shaft	304 Stainless Steel	431 Stainless Steel	431 Stainless Steel
Straps	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Cable Guard	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Priming Inducer	304 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Coupling	329/420/431 Stainless Steel	329/420/431 Stainless Steel	329/420/431 Stainless Steel
Check Valve Seat	NBR/304 Stainless Steel	NBR/316 Stainless Steel	NBR/316 Stainless Steel
Top Bearing	PTFE/304 Stainless Steel	PTFE/316 Stainless Steel	PTFE/316 Stainless Steel
Impeller Seal Ring	PTFE	PTFE	PTFE
Intermediate Bearings	PTFE	304 Stainless Steel	PTFE/316 Stainless Steel
Shaft Washer	Not Required	LCP (Vectra®)	LCP (Vectra®)
Split Cone	Not Required	304 Stainless Steel	304 Stainless Steel
Split Cone Nut	Not Required	316 Stainless Steel	304 Stainless Steel
Sleeve	Not Required	Not Required	316 Stainless Steel
Sleeve Flange	Not Required	Not Required	Zinless Bronze*

NOTES: Specifications subject to change without notice.

Valox® is a registered trademark of General Electric Co.

Vectra® is a registered trademark of Hoechst Calanese Corporation.

Ryton® is a registered trademark of Phillips 66.

\*Stainless Steel option available.

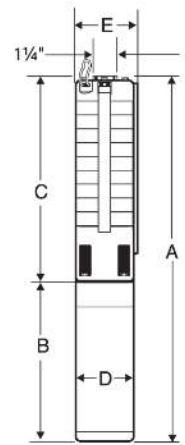


Fig. A

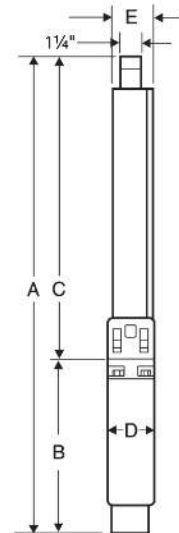


Fig. B



**Integrated Environmental Technologies, Inc.**

124 Edgewood Drive, Washington, PA 15301

(800) 270-6052 | FAX: (724) 261-5330

sales@ietechinc.com | www.ietechinc.com